

Critec Telecommunications Line Protector products are guaranteed to be free from defects in materials and workmanship for a period of five (5) years from the date of shipment from the manufacturer. A detailed statement of warranty is available upon request.

## 5 YEAR LIMITED WARRANTY

Please contact your local ERICO agent if you are unsure of installation practices.


Ensure that the side of the protector labelled "Equipment Side of Unit" connects toward the side of the terminal block wired to the equipment to be protected. If there is any doubt about which side of the terminal block is wired to the equipment to be protected, the wiring must be traced to its destination.

Additional earth clips must be fitted if the Krone Profile frame is used (identified by the metal uprights, as opposed to the solid metal frame of the standard product). Please contact your local ERICO agent for further information on supply of earth clips.

It is essential that surge and transient protectors are properly earthed to be effective, therefore the frame to which the protector is connected must be correctly earthed in accordance with local earthing standards.

Critec Telecommunications Line Protector products are designed to plug into the Krone LSA-Plus® disconnect termination system and provide protection for all ten pairs in the terminal block. For the products to perform as designed and provide effective protection, the following installation practices must be followed.

## INSTALLATION GUIDE

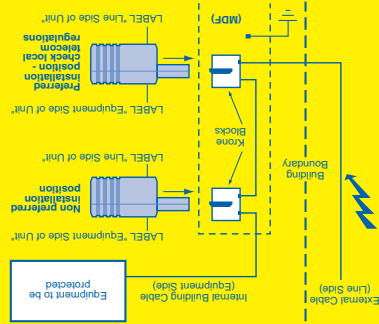

# CRITEC®

## LINE PROTECTOR

For PABX/MDF telephone line circuits and high density control/signal line protection

*Transient Protection for equipment using KRONE\* terminating systems*

\*KRONE is a registered trade mark of KRONE GmbH, Germany

**ERICO**  
www.erico.com

Made in Mexico

**ERICO®**